




Multifunction smoke ventilator

The Eura-R is the solution where permanent ventilation is required during inclement weather, for instance with industrial buildings. This is a variation of the standard Eura with the addition of side dampers.

The Eura-R extracts large volumes of smoke, utilizing the buoyancy of hot gases in the rising plume. Natural day-to-day ventilation is driven by pressure differences to move fresh air through the building. Pressure differences are caused by wind or the buoyancy effect created by temperature differences commonly known as the "stack effect".

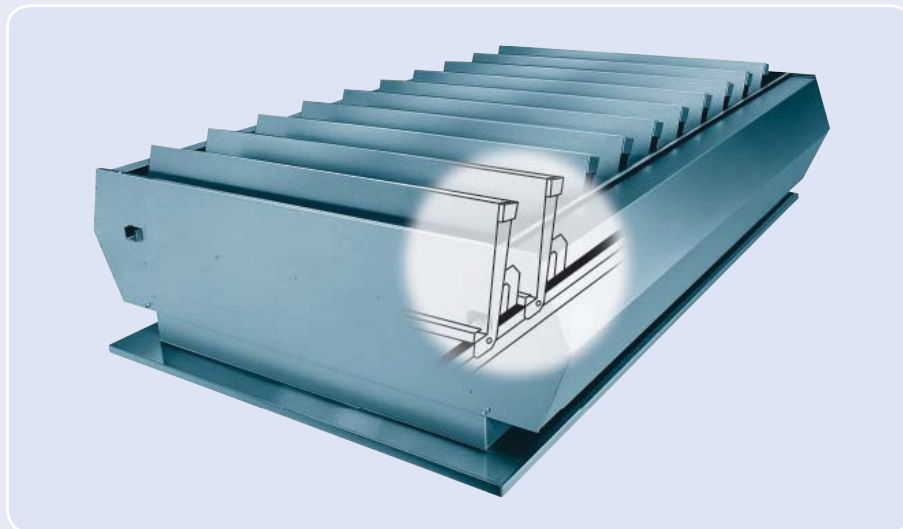

The Eura-R is available with a variety of louvre types including insulated aluminium, clear and opaque polycarbonate, either electrically or pneumatically operated and different base options for fixing onto roof sheeting or upstand.



Controls

- P** single-action compressed air operation
- P2** double-action compressed air operation
- M** motor operation
- K** cable operation



Extras: **B** including fire function
FS failsafe

Regulations

The system is tested and certified in accordance with EN 12101-2.

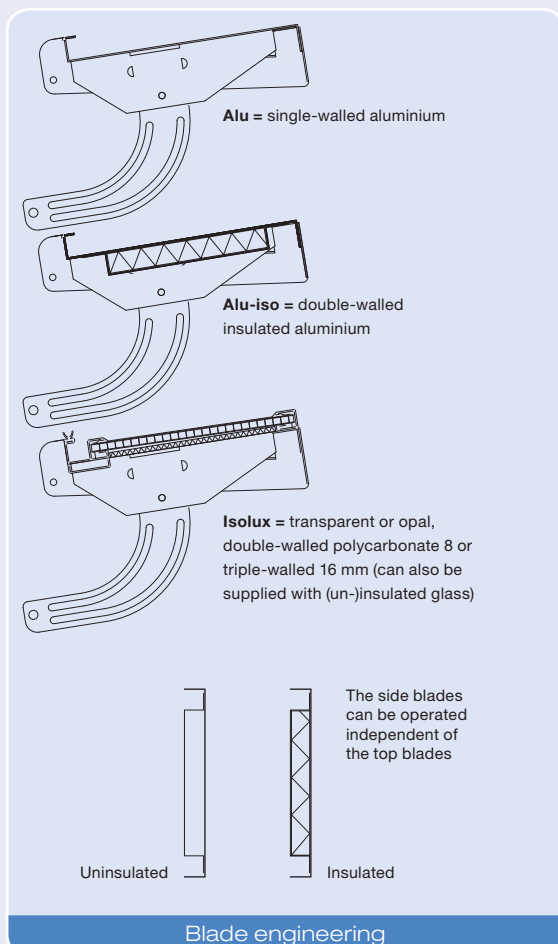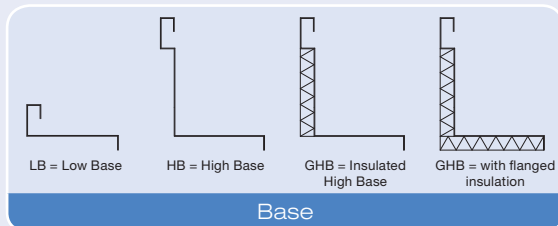

Type	Clear width in mm				Aerodynamic surface (m ²)		Weight Kg
	LB/GHB		HB		LB/GHB	HB	
	A	B	C	D			
060 - 3	600	720	640	760	0,26	0,29	36
060 - 4	600	940	640	980	0,34	0,38	40
060 - 5	600	1160	640	1200	0,42	0,46	44
060 - 6	600	1380	640	1420	0,50	0,55	49
060 - 7	600	1600	640	1640	0,58	0,63	53
060 - 8	600	1820	640	1860	0,66	0,71	58
060 - 9	600	2040	640	2080	0,73	0,80	62
060 - 10	600	2260	640	2300	0,81	0,90	67
060 - 11	600	2480	640	2520	0,89	0,98	71
060 - 12	600	2700	640	2740	0,79	1,05	76
060 - 13	600	2920	640	2960	1,05	1,14	80
120 - 3	1200	720	1240	760	0,52	0,57	50
120 - 4	1200	940	1240	980	0,68	0,73	57
120 - 5	1200	1160	1240	1200	0,84	0,89	64
120 - 6	1200	1380	1240	1420	0,99	1,06	70
120 - 7	1200	1600	1240	1640	1,15	1,22	77
120 - 8	1200	1820	1240	1860	1,31	1,38	83
120 - 9	1200	2040	1240	2080	1,47	1,57	90
120 - 10	1200	2260	1240	2300	1,65	1,74	96
120 - 11	1200	2480	1240	2520	1,82	1,91	103
120 - 12	1200	2700	1240	2740	1,94	2,04	109
120 - 13	1200	2920	1240	2960	2,10	2,20	116
180 - 3	1800	720	1840	760	0,78	0,84	66
180 - 4	1800	940	1840	980	1,02	1,08	75
180 - 5	1800	1160	1840	1200	1,25	1,32	84
180 - 6	1800	1380	1840	1420	1,49	1,57	93
180 - 7	1800	1600	1840	1640	1,73	1,84	102
180 - 8	1800	1820	1840	1860	1,97	2,09	111
180 - 9	1800	2040	1840	2080	2,24	2,33	120
180 - 10	1800	2260	1840	2300	2,48	2,53	129
180 - 11	1800	2480	1840	2520	2,72	2,83	138
180 - 12	1800	2700	1840	2740	2,92	3,02	147
180 - 13	1800	2920	1840	2960	3,15	3,27	156

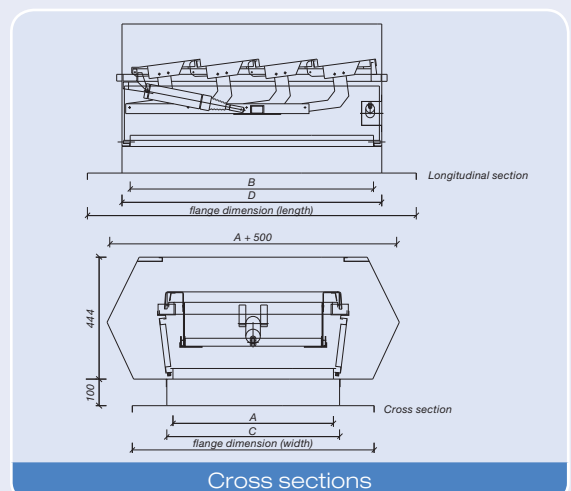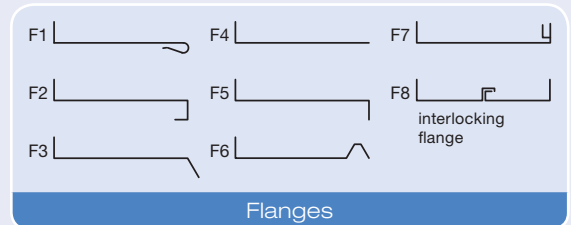

For more information please refer to our website: www.deltavent.com
 To contact us either call +44 (0)23 9286 3888 or email info@deltavent.com

